

Independent vacuum system

Lubricated technology



MOBILE MINIVAC

- Mobile and independent vacuum plant
- Lubricated rotary vane vacuum pumps (EVISA.R)
- Regulation by mechanical vacuum switch
- Receiver : 70 L
- Suction bacterial filtration
- Exhaust bacterial cartridge
- Standard suction network inlet (one on series, one on option)
- Ready-to-run plant



Characteristics

MOBILE MINIVAC EVISA Lubricated pumps	Nominal capacity $m^3 \cdot h^{-1}$		Power kW		Receiver capacity l	Filtration	Noise level dB(A)	Weight kg
	50 Hz	60 Hz	50 Hz	60 Hz				
Mobile MINIVAC - E25.R	28	33	0,75	0,9	70	FD30B	59	85
Mobile MINIVAC - E40.R	44	53	1,1	1,32	70	FD65B	58	100

Plant references


MOBILE MINIVAC EVISA	E25.R	E40.R
Mobile MINIVAC AFS* - 1-ph / 230V	912320	912209
Mobile MINIVAC AFS* - 3-ph / 400V	912943	912945

* AFS : simple filtration with by-pass

Accessories and option references

Network alarm	Independent	708510
Oil level security		625020
Additional vacuum quick connector		620449

Dimensions (mm)

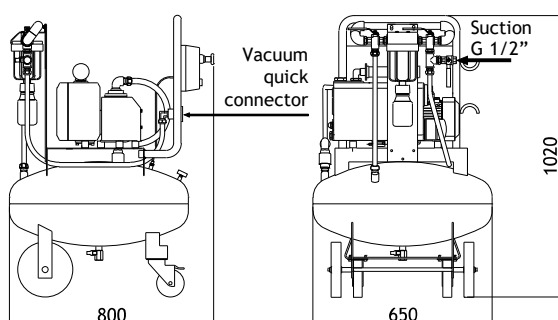

Rang complying with
93/42/CEE directive